


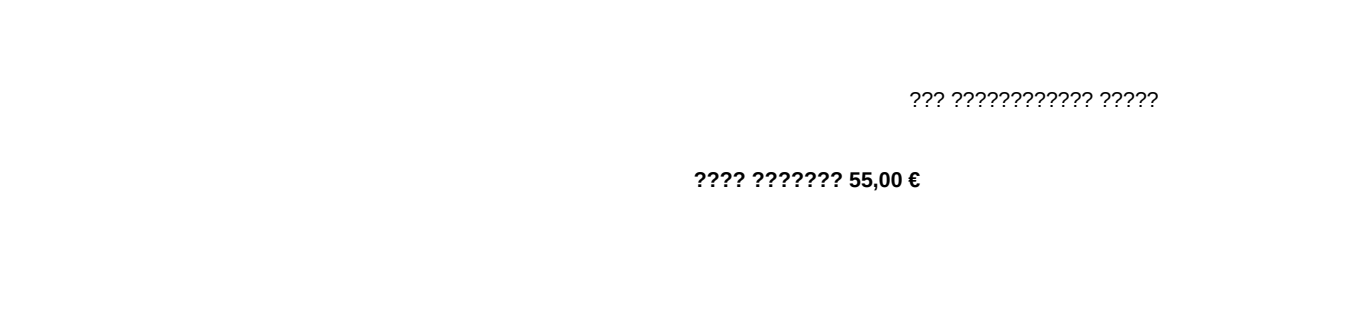

??????????

https://youtu.be/sN2_yLHVl4Y?si=RdmnJGdosuRaRb6T

Technical Specifications

- Marketing specifications
 - Product highlight
 - Direct-fit LED bulb
 - Expected benefits
 - Simple and fast installation
- Product description
 - Application
 - High Beam, Low Beam, Fog
 - Base
 - PX26d/PY26d-1
 - Designation
 - LED H7/H18 11972 12 V U2500 CX
 - Operating Temperature
 - 40°C/+85°C
 - Range
 - Ultinon Access
 - Technology
 - LED
 - Type
 - [?H11],
 - ECE R37 certification
 - No
 - ECE R10 certification
 - Yes
 - Polarity free

Yes

■ Lifetime

Life time

1500 hours

■ Light characteristics

Colour temperature

6000 K

Lumens [lm]

1600

■ Electrical characteristics

Wattage

16 W

Voltage

12 V

■ Ordering information

Order entry

11972U2500CX

Ordering code

02568550

■ Packaging Data

EAN1

8719018025685

EAN3

8719018025692

Packaging type

CX

EAN2

8719018025708

■ Packed product information

Length

9.5 cm

Width

4.7 cm

Height

7.9 cm

Pack Quantity

2 pcs

MOQ (for professionals)

4 sets/8 pcs

■ Outer pack information

Length

20.2 cm

Width

10.5 cm

Height

10 cm